


## Bond-Rite® CLAMP

### The self-testing static grounding clamp


The **Bond-Rite CLAMP**, patented exclusively by Newson Gale, is the only static grounding clamp that provides operators with visual verification that potentially charged equipment is connected to a verified static grounding point. The clamp contains a bright green LED which pulses continuously when it detects the grounding circuit has a resistance of 10 ohms or less. Once connected the **Bond-Rite CLAMP** continuously monitors the resistance of the circuit between the equipment and the verified ground point (e.g. wall-mounted bus bar).

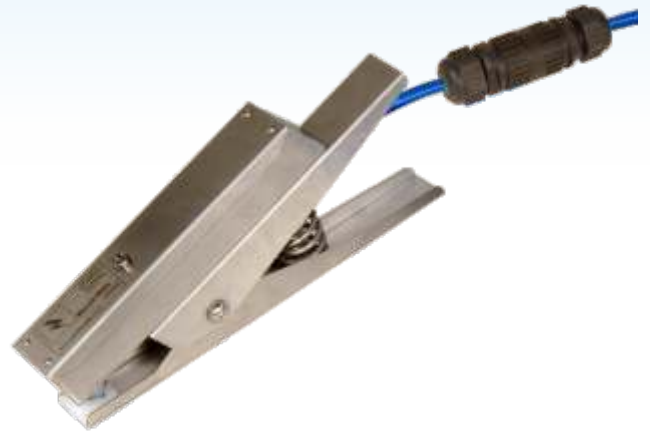

Bond-Rite CLAMP: stainless steel construction with robust circuit board enclosure

### Typical Applications

- **Filling and dispensing to/from conductive containers, including drums, waste drums, vessels.**
- **Grounding equipment used in mixing, blending and agitation operations.**

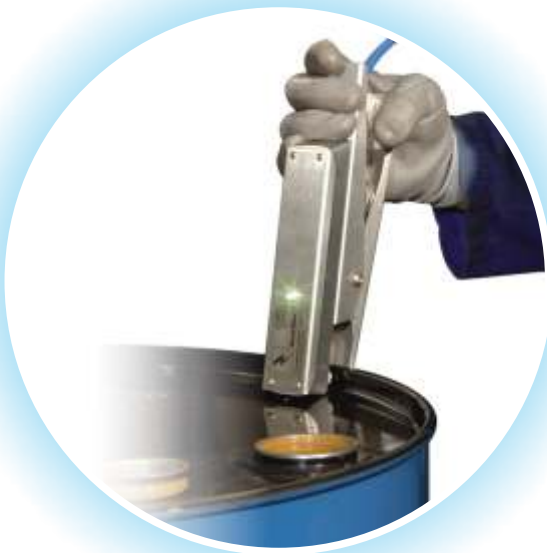


Pulsing LED confirms equipment is grounded



- Highly visible LED housed in grounding clamp ensures operators know when low resistance connection is achieved with potentially charged equipment.
- Tungsten carbide tips bite through product deposit build up, rust & drum coatings to ensure proper bonding connections are made.
- Stainless steel clamps designed to withstand use in tough chemical processing and industrial environments.
- Quick Connect provides personnel with the flexibility of removing the clamp from zoned / classified areas for battery replacement.
- 10 ohms loop resistance monitoring compliant with international Best Practice standards.
- Junction box mounted stowage pin provides operators with location to return the clamp when the process is complete.



Bond-Rite CLAMP supplied with 2 conductor cable, junction box, clamp stowage pin and grounding leads. Circuit monitoring board and battery mounted inside clamp.  
*Grounding bus-bar not supplied.*



Tungsten Carbide tips penetrate static dissipation inhibitors including rust, product deposits and paint coatings

### Certification

II 1 GD EEx ia IIC T4

IS, Class I, II & III,

**DIV. 1 & 2** and all gas groups  
Zones 1 & 2

### Battery

9v Lithium Manganese  
ULTRALIFE U9VL-J battery included

### Monitoring Set Point

10 Ohms

Ordering Code	Product Description
BRC03	Bond-Rite Clamp + 3m (10ft) Hytrel Blue 2 Core Spiral Cable + Junction Box c/w Stowage Pin & Quick Connect.
BRC05	Bond-Rite Clamp + 5m (16ft) Hytrel Blue 2 Core Spiral Cable + Junction Box c/w Stowage Pin & Quick Connect.
BRC10	Bond-Rite Clamp + 10m (32ft) Hytrel Blue 2 Core Spiral Cable + Junction Box c/w Stowage Pin & Quick Connect.

The replaceable 9V battery provides up to 6 months of power for equipment grounded for up to an average of 6 hours per day. If longer periods are required please contact us for alternative Bond-Rite options.

The Bond-Rite CLAMP forms part of the Bond-Rite range of Static Grounding and Bonding Equipment available from Newson Gale



Leading the way in hazardous area static control

[www.newson-gale.com](http://www.newson-gale.com)

**Newson Gale Inc**  
460 Faraday Avenue  
Unit B, Suite 1  
Jackson, NJ 08527  
USA

Tel: +1 732 961 7610  
Fax: +1 732 791 2182

Email: [groundit@newson-gale.com](mailto:groundit@newson-gale.com)

**Newson Gale Ltd**  
Omega House  
Private Road 8  
Colwick, Nottingham  
NG4 2JX, UK

Tel: +44 (0)115 940 7500  
Fax: +44 (0)115 940 7501

Email: [groundit@newson-gale.co.uk](mailto:groundit@newson-gale.co.uk)