

Earth-Rite RTR[™] (PATENT PENDING) Tri-Mode Technology

Static Earthing for Road Tankers

Road Tanker Recognition

Only allows product transfer when system is connected to road tanker

Positive Earth Recognition

Automatically confirms positive static earth connection

Earth Connection Monitoring

Continuously monitors clamp and earth connection during transfer



SIL 2



ATEX



APPROVED

IECEX



The **Earth-Rite RTR[™]** ensures the highest possible levels of safe, positive earthing for road tankers during flammable transfer operations. Unlike conventional systems, the **Earth-Rite RTR[™]** provides failsafe confirmation of the static earth condition using patented Intrinsically Safe Electronics.



Earth-Rite RTR™

Tri-Mode Technology (PATENT PENDING)

MODE 1 | Road Tanker Recognition

Confirms RTR clamp is connected to road tanker and not other earthed/unearthed objects.

MODE 2 | Positive Earth Recognition

Confirms positive static earth connection before connecting tanker to earth.

MODE 3 | Earth Connection Monitoring

Confirms clamp connection and earth connection is good throughout transfer process by ensuring connection resistance does not rise above 10 Ohms.

For ordering codes and more detailed technical information please refer to product specification sheet.

The **Earth-Rite RTR™ Static Earthing System** is designed specifically for road tankers with rubber tyres. For dedicated loading/unloading of Rail Cars or other conductive mobile tanks, IBC totes and drums the standard **Earth-Rite PLUS** system with Single Mode (Earth resistance monitoring) is available. For **complete flexibility in mixed loading applications** specify the **Earth-Rite RTR™** with additional **Mode Selector Key Switch**.


ATEX Certification:

Ex d (ia) IIB T6

Ex d (ia) IIC T6

Functional Safety Rating: SIL 2

GREEN LIGHT ✓
Tri-Mode checks complete - RTR permits product transfer

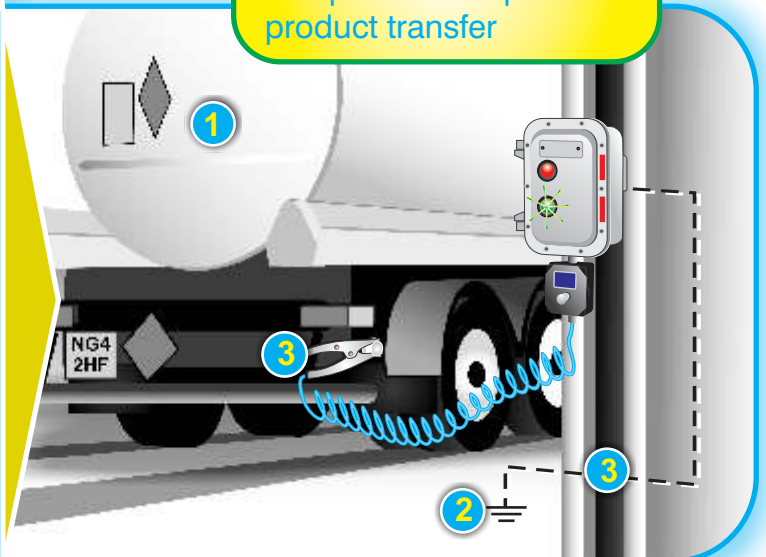

Reliability | The RTR has been independently tested and approved for mounting in SIL2 rated environments confirming the Earth-Rite's 10 year track record of proven system reliability and performance.

Flexibility | The RTR can be mounted at remote loading stations and connected to locally verified earth points and can reduce the cost of installation and maintenance.

Compliance with NFPA 77 and GENELEC 50404 | The RTR enables compliance with the best practice guidelines of NFPA 77 & GENELEC 50404 which recommend that road tankers present in hazardous atmospheres be fully earthed prior to and during the transfer of cargo.

The Earth-Rite RTR forms part of the Earth-Rite range of Static Grounding and Bonding Equipment available from Newson Gale



Leading the way in hazardous area static control

www.newson-gale.com

Newson Gale Inc
460 Faraday Avenue
Unit B, Suite 1
Jackson, NJ 08527
USA

Tel: +1 732 987 7715

Fax: +1 732 791 2182

Email: groundit@newson-gale.com

Newson Gale Ltd
Omega House
Private Road 8
Colwick, Nottingham
NG4 2JX, UK

Tel: +44 (0)115 940 7500

Fax: +44 (0)115 940 7501

Email: groundit@newson-gale.co.uk